

USER GUIDE

HA-1X4

4-Channel Stereo Headphone Amp


Thank you for purchasing a Nady HA-1X4 Stereo Headphone Amp. This unit is versatile — perfect for most studio recording, live rehearsals, and field recording applications.

- Allows 4 channels of stereo headphone monitoring with individual level controls
- Advanced design for widest dynamic range, with lowest noise and distortion
- 1/4" Stereo jack input can be driven by any line level or headphone amp output
- Rugged metal chassis for long-life reliability



CONTROLS & CONNECTIONS

- 1) 12VDC Power
- 2) Power LED
- 3) 1/4" stereo input jack
- 4) 4 x Individual volume controls
- 5) 4 x 1/4" TRS stereo output jacks

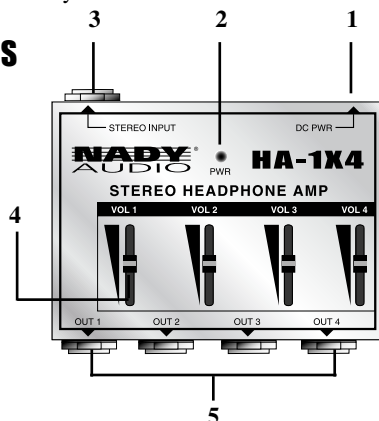

SPECIFICATIONS

Input Connections	1 x 1/4" TRS stereo phone
Output Connectors	4 x 1/4" TRS stereo phone
Power Indicator	Red
Output Level	4 audio stereo, 133.7 mVrms @ 8Ω, 2.2mW / output x 4
Frequency Response	20Hz to 25kHz, +/- 3dB
Maximum Input Level	+ 14dBV
Maximum Output Level.....	20dB per channel
S/N Ratio.....	>90 dB
Power	12 VDC / 350 mA adapter
Dimensions (W x Dx H)	4 " x 3" x 1.25" (102 x 76 x 32 mm)
Weight.....	9 oz (255g)

SERVICE

(U.S.) Should your Nady HA-1X4 Stereo Headphone Amp require service, please contact the Nady Customer Service Department via telephone: (510) 652-2411 or e-mail: service@nady.com.

(INTERNATIONAL) For service, please contact the Nady distributor in your country through the dealer from whom you purchased this product. The warranty card supplied with this system provides valuable warranty and service information. Store it in a safe place for future reference. Do not attempt to service this unit yourself as it will void your warranty.



NADY SYSTEMS, Inc.

6701 Shellmound Street • Emeryville, CA 94608

Tel: 510.652.2411 • Fax: 510.652.5075 • www.nady.com